


- GT529-BRUB Finish(B)
- GT529-BRUBG Finish(BG)
- GT529-BRUC Finish(C)
- GT529-BRUS Finish(S)



Specifications

Features

- 1.8 GPM Flow Rate
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- 3/8" Connections
- 360° Rotating Spout
- 11" Pull-Down Hose Length
- Braided Nylon Hose
- AccuDock™ Sprayhead Docking
- MagnePfit™ Sprayhead Docking
- Forward Handle Operation
- Optional Deckplate, Order 961-258* Separately
- Nylon Flex-Line Supply Lines
- Wipe Clean™ Nozzles
- Pfast Connect™
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

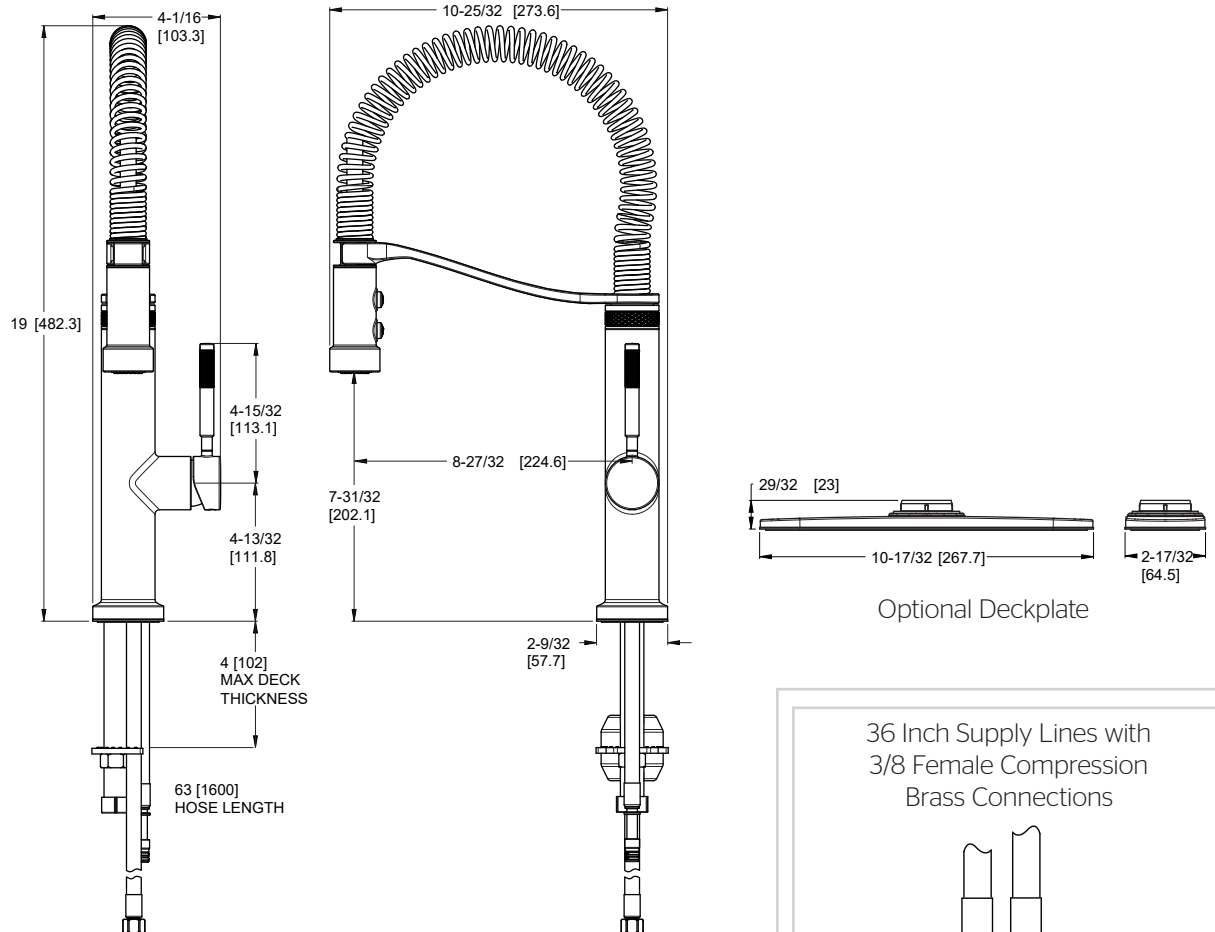

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

36 Inch Supply Lines with 3/8 Female Compression Brass Connections

